

# Specification

pproved	Checked	Prepared

Confirmed	Approved
	Confirmed

CE

RoHS

**5050** SMD

**60** LEDS/M LED Strip DC **12V** 

1P **67** 

3 Years





#### Model:RN3260AQ

5000\*12mm,300pcs 5050SMD LED,12V DC, Colorful group control half package glue series flexible lamp belt

## Figure:



#### Features:

- 5050 RGB LED guarantees high luminance;
- One BIN only, good color uniformity;
- The product can be cut along the scissors symbol position;
- Whole new ID, simple and elegant;
- O CE, RoHS, UL, etc. compliant.

## **Applications:**

 Suitable for hotel, shopping mall, home, cabinet, show frame, etc. as main lighting, indirect lighting, cove lighting, contour lighting, decorative lighting, etc

## Warranty:

○ 3 years or 13,000 hours, whichever comes first.

## **Optical and Electrical Parameters:**

D/N	LED	CCT (K)	CDI	SD	Beam	Luminous				king nt(mA)	Power(w)	
P/N	Color	WL (nm) CM	_	(Im/W)	(VDC)	1m[39 .37in]	5m[19 6.8in]	1m[39 .37in]	5m[19 6.8in]			
	Red	620-625				94.6	22		360	1430	4.3	17.2
RN3260AQ	Green	525-530			≥115	258	60	12	360	1430	4.3	17.2
	Blue	465-470			-	68.8	16		360	1430	4.3	17.2

### Others:


	P/N	IP	Operating Temp		Storage Temp			indard ength		scading ngth	LED Qty	We	eight		
		Grade	(℃)	( <b>T</b> )	(℃)	<b>(</b> T)	(m)	(inch)	( <b>m</b> )	(inch)	(pcs)	(g/m)	(lb/m)		
	DNIGOCOAO	ID67	-25~	-13~	-25~	-13~	5 1	5 196.8	_	400.0	_	400.0	00	20	0.000
	RN3260AQ	IP67	+60	+140	+70	+158			5 196.8	196.8	5	196.8	60	30	0.066







# **Profile Drawings:**

Unit: mm[inch]

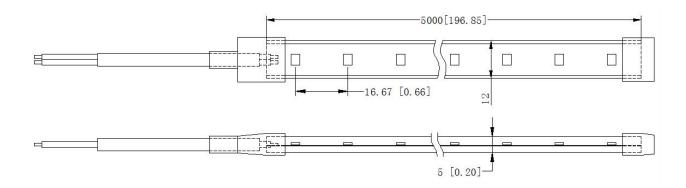

# **Light Distribution/Iso-illuminance Diagram:**






# **Packaging Information:**

	04.	Other	Total	Total	walaht			Outer ca	rton size		
P/N	Qty (m/reel)	Qty (m/carton)	Qty	TOTAL	weight	len	gth	wi	dth	hei	ght
	(III/Teel)	(III/Carton)	(m)	(Kg)	(lb)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)
RN3260AQ	5	60	120	5.1	11.2	238	9.37	222	8.74	238	9.37


Notes: the actual packed quantity and weight might differ from the above data in other packaging ways. Thus please refer to the actual product for detailed information.



# **Packaging Diagram:**

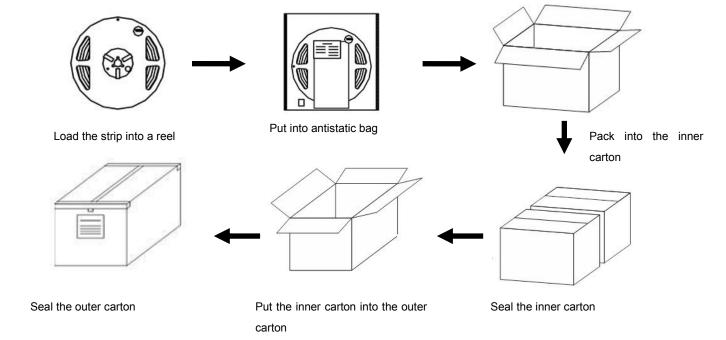

#### **Connection Instruction:**

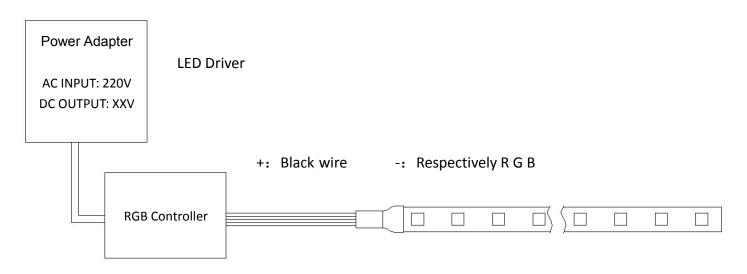


Note: Please connect the '+' and '-' of strips to those of driver output correctly.

# Parts & Tools:







## **Installation Steps & Cautions:**



 Make sure the mounting surface is clean before installation;




Calculate the needed length and cut off the extra length along cutting mark if necessary; if need to add wires, please weld them at the next location with printed mark




While sticking strips, peel off the release paper of the tape step by step. Don't peel off all release paper at a time to avoid getting your strip in a mess.

△Notes: No pressing the bead!



 Stick Mylar tape to isolate the cutting position from the bottom of profile inner slot to avoid short-circuit;




 ○ The installation at the corner is shown as the above figure.
 △ Notes: No bending it into right


angle; No twisting it to stick on the mounting surface.




© Connect strip wires to the output terminal of controller, and connect controller to the power supply, and dispose with waterproof, insulation, short-circuit and anti-corrosion protection at both the wire joints and the cut section of your strip (if any)



No bending the strip at the position of LED



No twisting the strip



 No winding an object with a diameter <5cm.</li>



Stock Code: 002654

## **Troubleshooting:**

Malfunctions	Possible Causes	Solutions
	The power supply did not connect to power grid.	Power on
All LEDs don't work	No electricity due to short-circuit of external power supply.	Remove the malfunction caused by short-circuit, power on again.
	The wires of strips connect to power supply output reversely.	Check the connecting and ensure the wires are connected correctly.
Part of LEDs don't work	<ol> <li>Part of power supplies do not have output.</li> <li>Part of wires of strips have malfunction.</li> </ol>	Check the power supply system.
	Particular modules connected reversely.	Correct connection
	Overloaded power supply;	Replace it with higher power supply
Brightness of LEDs is weak or uneven	The power loss of power circuit is huge or the power loss of each circuit existing big difference.	Ensure working voltage of strips is within±5%V of rated voltage.  1. Shorten the length of wires between the first strip and power supply or replaced with wires with bigger diameter;  2. Ensure the cascading qty of string is less than or equal to the allowed maximum cascading qty, and each strip cascading qty is well-balanced.
	Exceed in qty of strips in series	Lessen the cascading qty for strip and ensure the qty for each electrical circuit is within the maximum cascading qty.
LEDs are blinking	Poor contacted in the joints.	Find out and tackle malfunction immediately.
LLD3 are billiking	2. Failures in power supply.	Power on

#### **Declaration:**

- Olf the external flexible cable of light box is damaged, please replace it by its manufacturer or its service agent or qualified person to avoid a hazard.
- The specific installation and cautions please refer to the user manual.
- ○The given data in this specification is based on our standard product. There may be existed slight difference compared with actual products.
- All Illustrations in this specification are for reference only.
- This product is subject to change or modify without prior notice.
- ©RISHANG OPTOELECTRONICS CO., LTD reserves the right of final explanation for this specification.

<End>

## Rishang Optoelectronics Co., Ltd (stock code: 002654)

Add: Block 2, Hongfajiateli High-Tech. Park Tangtou Ave., Shiyan, and Bao'an Shenzhen GuangDong, 518108, China.

Tell: +86-755-36988588 E-mail: info@ledlamps.com.cn

Website: www.ledlamps.com.cn

Hot line 3 400-880-2460
Email:info@ledlamps.com.cn Web:ledlamps.com.com



Website

WeChat Account

