


# RF Single Color Remote Controller

09.283Z3.04371



**Important:** Read All Instructions Prior to Installation

## Function introduction

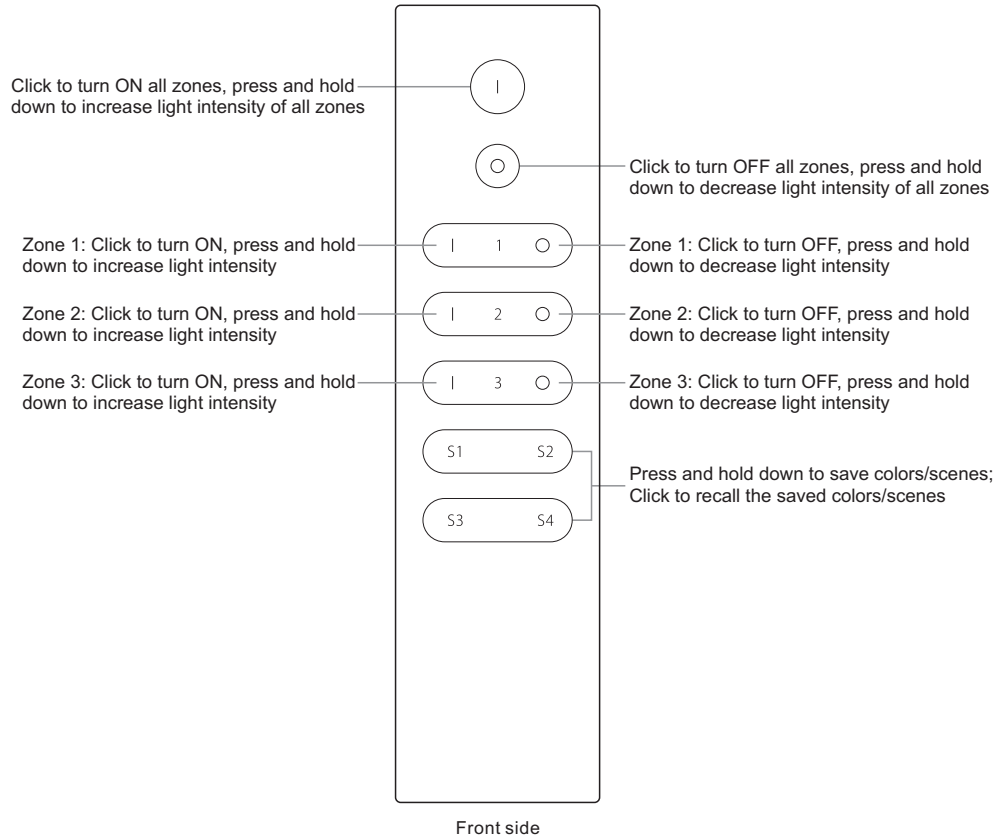

**Note:** Before the first use, please remove the protective film on the battery.

Back side

## Product Data


| Output                | RF signal            |
|-----------------------|----------------------|
| Operation Frequency   | 869.5/916.5/434MHz   |
| Power Supply          | 3V(1xCR2025 battery) |
| Operating temperature | 0-40°C               |
| Relative humidity     | 8% to 80%            |
| Dimensions            | 150x38.6x12mm        |

- Control 3 zones of receivers separately
- Single color controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

## Safety & Warnings

- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

## Pair with RF receiver

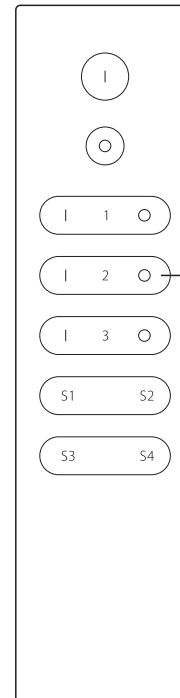

**Step 1:** Do wiring the RF receiver according to wiring diagram (please refer to the instruction of RF receiver that you would like to pair with).




**Step 2:** Click the "Learning Key" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status

**Step 3:** Choose one zone and click I or O of the zone (e.g. zone 2), LED lights connected with the RF receiver flicker once means the receiver is paired with zone 2 successfully.

**Note:** one receiver can be paired with max 8 remote controls.

**If you use multiple receivers, you have two choices:**

- Option 1: have all the receivers in the same zone, like zone 1
- Option 2: have all the receivers in different zones, like zone 1, zone 2 and zone 3

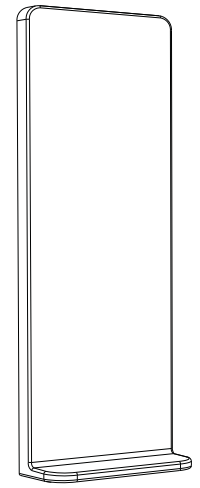

Magnetic Bracket