


SP633E使用说明书



SP633E 3CH PWM RGB LED控制器



一、简介：

三路PWM RGB LED控制器，特有的动态、音乐和自定义效果，让你掌控任何场景氛围。

二、功能特点：

- 1、支持手机App、2.4G触控遥控器和2.4G触控86盒等多种控制方式；
- 2、支持多种动态、音乐和自定义效果；
- 3、支持动态效果收藏，收藏列表循环播放；
- 4、支持手机麦克风、播放器串流和板载麦克风的音乐采集方式；
- 5、支持校准通道顺序和定时开关；
- 6、支持OTA固件升级。

三、手机APP：



1. SP633E支持App控制，支持iOS和安卓系统；
2. 苹果设备需要iOS10.0或更高版本，安卓设备需要Android 4.4或者高版本；
3. 可在App Store、Google Play搜索“BanlanX”找到APP，或者扫描二维码下载安装。

APP操作引导

- 打开App点击首页右上角的 + 添加设备；
- 在操作界面点击右上角的 ⚙️ 进入设置界面，可以修改名称，定时开关，设置开关机效果，OTA固件升级等操作。

四、支持2.4G触控遥控：

与SP633E匹配的2.4G触控遥控器型号(RB3和RC3)如下：

- 支持一对多控制，一个遥控器可以控制多个控制器；
- 支持多对一控制，每个控制器可以绑定最多5个遥控器；
- 支持统一控制和4个分区控制。

注：详细说明见《2.4G RF触控遥控器说明书》



RB3



RC3


(RB3和RC3需另行购买)

五、技术参数：


控制器参数

工作电压:DC5V~24V	工作电流:1mA~10mA
PWM单路最大输出电流:6A	整机最大输出电流:12A
工作温度:-20°C~60°C	控制器尺寸:78mm*56mm*20mm

六、接口方式：

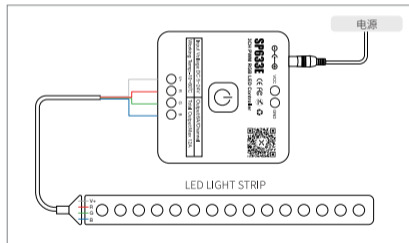

SP633E Instructions



SP633E 3CH PWM RGB LED Controller



1.Brief:

Three-way PWM RGB LED controller, with unique dynamics, music and DIY effects, allowing you to set the right ambience for any scene.

2.Features:

1. Support App control, 2.4G touch remote control and 2.4G touch 86-type control panel;
2. With a variety of dynamic, music and DIY effects;
3. Support effect collection;
4. Capture music through the phone microphone, player streamer and on-board microphone;
5. With sequential channel calibration and ON/OFF timer functions;
6. Support OTA firmware upgrade.

3.APP:



- 1.SP633E supports App control for iOS and Android devices.
- 2.Apple devices require iOS 10.0 or higher, and Android devices require Android 4.4 or higher.
- 3.You can search "BanlanX" in App Store or Google Play to find the APP, or scan the QR code to download and install.

Operations

- Open the App, click the + icon in the top right corner of the home page to add device;
- Click the ⚙ icon in the upper right corner of the App to enter the settings page, where you can modify the device name, set the timings, set the on/off effect, OTA firmware upgrade, etc.

4.Work With 2.4G Touch Remote Control:

The 2.4G touch remote control models (RB3 and RC3) matched with SP633E are as follows:

- Support one-to-many control,one remote control can control multiple controllers.
- Support many-to-one control, each controller can bind up to 5 remote controls.
- Support unified control and 4-zones control.

NOTE:For more information, refer to“2.4G Touch Remote Control Instructions”



RB3



RC3

(Requires separate purchase)

5. Technical Parameters:

Working Voltage: DC5V~24V	Working Current: 1mA~10mA
PWM Single Channel Maximum Output Current: 6A	PWM Total Maximum Output Current: 12A
Working Temp: -20°C~60°C	Dimension: 78mm*56mm*20mm

6. Wiring:

